



UPB3 Ceramic Pressure Transmitter

Description

UPB3 ceramic pressure transmitter is made integrated structure by using high quality thick-film ceramic sensors and special amplified circuits. The output of UPB3 is configured to 4~20mA current loop, or 0~5Vdc, or 0~10Vdc, or 1~5Vdc voltage signals. The pressure diaphragm of this transmitter is made from ceramic material, while its wetted parts is made from 1Cr18Ni9Ti stainless steel. Because of the thermal stability of ceramic and its thick-film resistance, the transmitter can be operated in a higher temperature range; at the same time, this also makes the zero & sensitivity thermal shifts over the whole operating temperature range of the transmitter is very small.

The compensated temperature range of UPB3 is 0~70°C, UPB3 is designed for use in most industrial application, and this product is suitable for measurement of most pressure medium (including corrosive medium) directly.

Features

- Many measuring pressure range
- Wide application scope and long service life
- Automatic testing and compensating zero & sensitivity
- High accuracy & long-term stability
- Good ability on anti-corrosion & anti-impact




Specifications

pressure medium	gas or liquid compatible with ceramic and stainless steel
pressure ranges	0~2bar...200bar
overload pressure	150%FS
output signal	4~20mA, 0~5V, 0~10V, 1~5V
accuracy	0.25%FS, 0.5%FS(standard)
load resistance	$R_L = (U - 12V) / 0.02A$ (4~20mA current output) U—loop voltage (V)
long-term stability	<0.2%FS/year
supply voltage	12~36VDC
compensated temperature range	0~70°C
operating temperature range	-30~95°C
storage temperature range	-40~100°C
temperature coefficient of zero	0.3%FS/10°C
temperature coefficient of span	0.3%FS/10°C
insulation resistance	100MΩ@50VDC
process connection	G1/4 or others
electrical connection	hirschmann connector or others
material of wetted part	1Cr18Ni9Ti
material of pressure membrane	ceramic
material of housing	1Cr18Ni9Ti
sealing	n-Butyronitrile or fluoro-rubber sealing ring

Electrical connection


Connection Cable color(pin)

Power“+” Red(1)
Signal“+” Yellow(2)

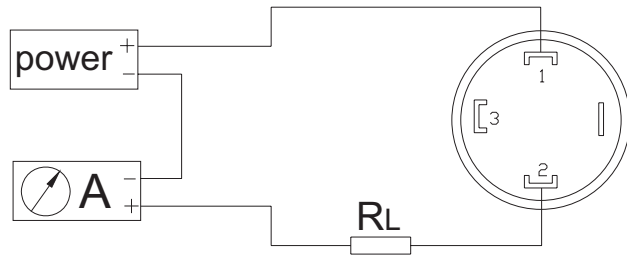

Wiring drawing of two-wire 4~20mA output (hirschmann)

Dimensions

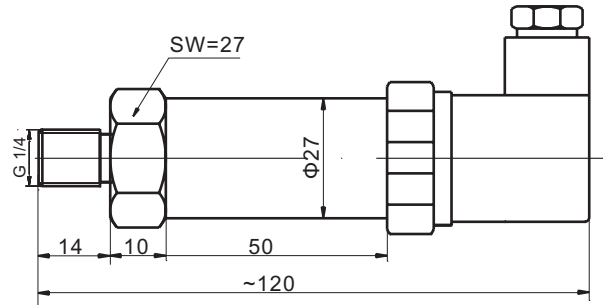

Note: this product can be made according to customer's required dimensions.

Ordering code

UPB3					
	range (0~X)bar	measuring range: 0~1bar...200bar			
		X: required measuring range			
		code	output		
		O1	4~20mA		
		O2	0~5V		
		O3	1~5V		
		O4	customer request		
			code	process connection	
			P1	G1/4	
			P3	1/4NPT	
		P4	M20×1.5		
		Pz	customer request		
			code	electrical connection	
			E1	hirschmann connector	
			E2	aviation connector	
			E3	3m shielded PVC cable	
			Ez	customer request	
UPB3	(0~200)bar	O1	P3	E1	