


- ❑ All Plastic One-Piece Design
- ❑ No Filling or Assembly Required
- ❑ Completely Corrosion Resistant

Atmospheric Pressure Compensator

Range Markers

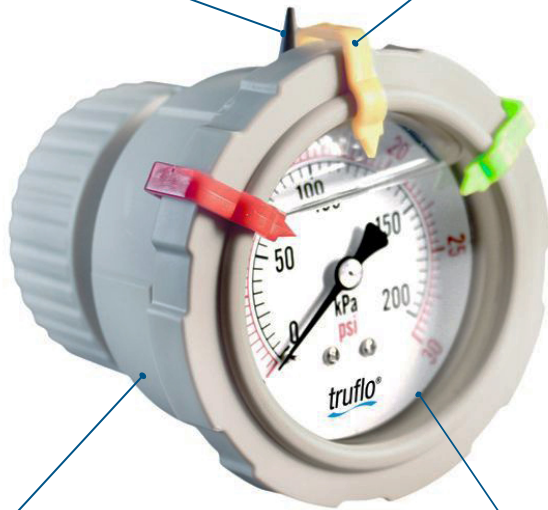

PVC | PP | PVDF

Factory Pre-Filled

### Product Description

The OBS-B Series is the industry's only integral molded one-piece plastic pressure gauge and gauge guard. Gauge guards are utilized to protect the pressure gauge from any corrosive media in the processing system via an isolator.

The OBS-B Series Pressure Gauges are truly unique and industry-leading when it comes to pressure measurement in corrosive environments.

OBS-B Pressure Gauges are a one-piece design and come factory pre-filled, resulting in an industry-leading accuracy of 1.5%. Eliminating the need for filling saves the user time and the difficulty of having to fill a gauge isolator.

The 3 movable red, yellow and green range tabs are designed to act as a visual pressure alert for bag or filter change-outs.

The OBS-B Series is available in PVC, PP & PVDF, all equipped with a Teflon® Diaphragm, making the entire unit completely corrosion resistant and the perfect pressure gauge for chemical applications.

Engineering the entire body in a plastic housing rather than just the gauge guard allows users to be confident that the complete unit will stand up in even the most corrosive environments.

### Integral Molded Gauge | Gauge Guard

- ❑ No Filling or Assembly Required
- ❑ Increased Accuracy Compared to 2 Piece Gauge + Gauge Guard
- ❑ Convuluted Teflon® Diaphragm for Higher Sensitivity

Integral Guard



### Pressure Range Markers

- ❑ Easily Customizable
- ❑ Easily 7 in. gauge in UV Y'te'nci f' DfcWgg'7 cbX]jcbg
- ❑ Eliminates Manually Marking on Gauge
- ❑ Red | Yellow | Green

Customize



### Factory Pre-Filled

- ❑ Reduces Installation Time
- ❑ Increases Accuracy
- ❑ Eliminates the Mess of Self-Filling
- ❑ Removes Air Bubble Issues



### Features

- ❑ Industry's Most Accurate |  $\pm 1.5\%$
- ❑ PVC | PP | PVDF
- ❑ Teflon® Bonded Diaphragm
- ❑ Large 2 1/2" Dial
- ❑ All Plastic | Completely Corrosion Resistant
- ❑ Dual Scale | psi | bar

PVC

PP

PVDF



### Specifications

Mounting	Center Mount   Back Connection
Process Connection	½" MNPT   FNPT   G   Flanged
Measuring Principle	Bourdon Tube   316 SS
Pressure Ranges   psi	0-15   0-30   0-60   0-100   0-160   0-200
Lens	High Impact Polycarbonate
Filling	Glycerin   Silicon*   Halocarbon*
Accuracy	± 1.5%
Operating Temperature	PVC - 140°F   PP - 190°F   PVDF - 240°F
Dial Diameter	2 ½"


Optional\*

### Installation Instructions

Do not tighten by grasping the case of the gauge as this may cause damage. **Always Pressure Test Connections for Leaks** with Water Prior to Use on Chemical Service

Before installing the OBS-B Series pressure gauge, ensure attention is given to the Process Liquid, Chemical Compatibility, Temperature, Vibration, Pressure Spikes, and other climatic and application conditions that may adversely affect the performance.

The user shall ensure that the correct gauge pressure range and the correct materials of construction are selected.

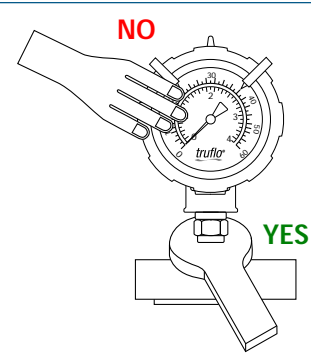

### Standards and Approvals

CE | FCC

RoHS Compliant

### Temperature | Pressure Graphs | Non-Wetted

**Note:** The Pressure/Temperature graphs are specifically for the Truflo® Pressure Gauges, during system design the specifications of all components must be considered.

### MODEL SELECTION

OBS-B - P - 0-30 - M

Body Material	Pressure Range   psi	Connection
P - PVC	0 - 15    0 - 100	F - ½" FNPT    G - Type
PP - PP	0 - 30    0 - 160	M - ½ MNPT    FL - Flanged
PF - PVDF	0 - 60    0 - 200	

\*Consult Factory for Other Options

